



BOMBOM 4 legs
5003-4LGT
Design Favaretto&Partners

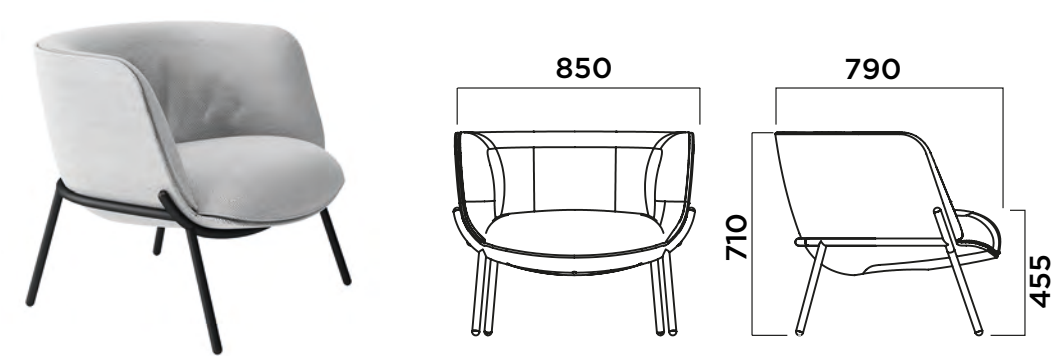

FRAME

TELAIO
BASTIDOR

Metal frame in round tube diameter 25 mm, thickness 2 mm, accordingly with UNI EN 10305-3 rule in Asform.
Telaio in metallo con tubo tondo di diametro 25 mm, spessore 2 mm, in conformità della norma UNI EN 10305-3 in Asform.
Bastidor metálico de tubo redondo de 25 mm de diámetro y 2 mm de espesor, conforme a la norma UNI EN 10305-3 en Asform.



UPHOLSTERY

TAPPEZZERIA
TAPIZADOS

Rigid cold-foamed polyurethane shell. Seat and back in soft cold-foamed polyurethane.
Scocca in poliuretano rigido schiumato a freddo. Sedile e schienale in poliuretano morbido schiumato a freddo.
Carcasa de poliuretano expandido en frío rígido. Asiento y respaldo de poliuretano blando expandido en frío.

- A Space,Panarea
- B Eco Leather
- C Convert D,Velvety,Step, Step Melange, Nuvole,Norfolk
- D Revive ,Reflect ,Rolla
- E Oceanic ,Yoredale,Volta Celeste
- F Steelcut Quartet,Canvas2
- G Divina Melange, Fiord
- H Full Leather,Safire

COM Fabric(m) COM Leather(m2)

In2.7+Out1.5 In4.5+Out2.7

FINISHING

FINITURA
ACABADO

Chrome plating with medium thickness 5 µ. Painted frame with epoxy-polyester powder with average thickness of 50 µ.
Telaio cromato con spessore medio 5 µ. Telaio verniciato con polveri epossipoliesteri spessore medio 50 µ.
Cromado con 5 µ de espesor medio. Bastidor con recubrimiento en polvo epoxipoliéster con 50 µ de espesor medio.

FEET

PIEDINI
PIES DE APOYO

Polypropylene
Polipropilene
Polipropileno

PKG

IMBALLO
EMBALAJE

Pkg	A(cm)	B(cm)	h(cm)	MC	PCS	Weight (kg)
86	83	78	0.56	1	19.6	