




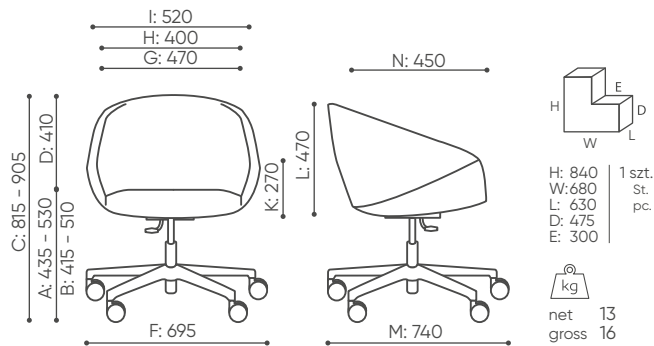



OX 102

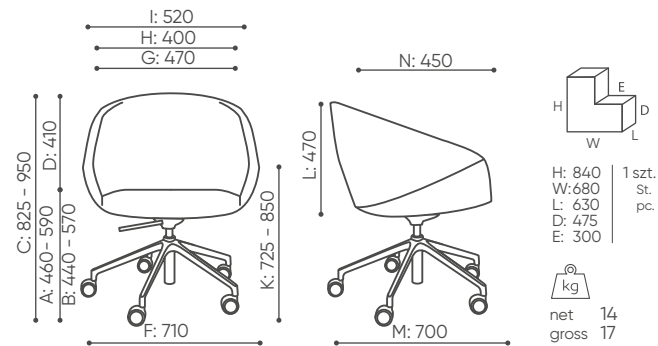



OX 5R

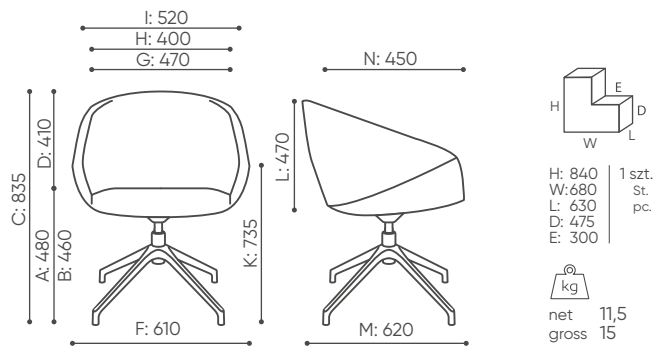



OX 4R

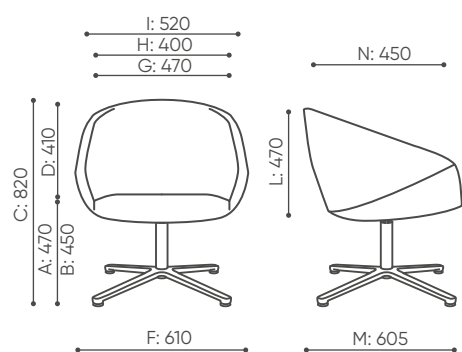



OX 4C

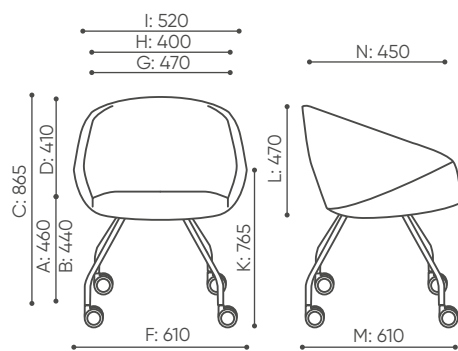



OX 260

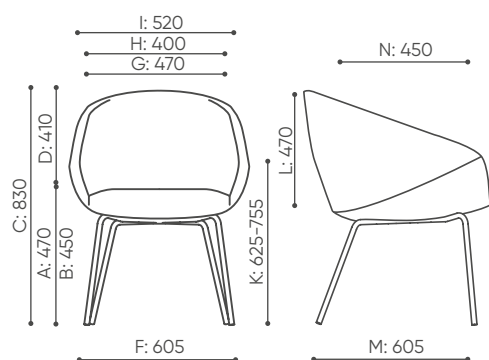



OX 215

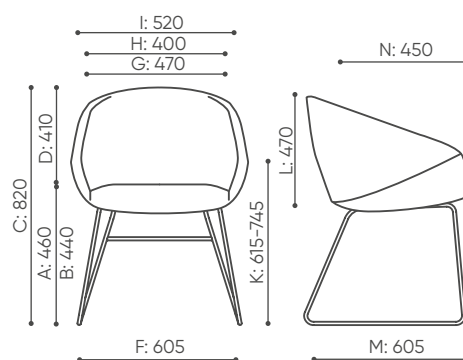



OX 270

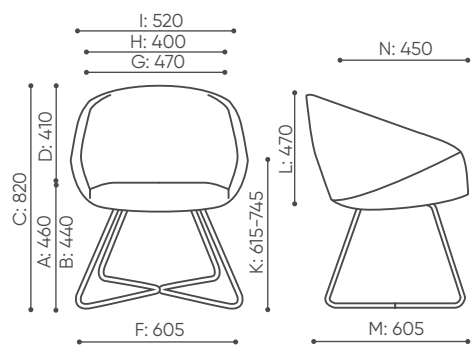


OX 290

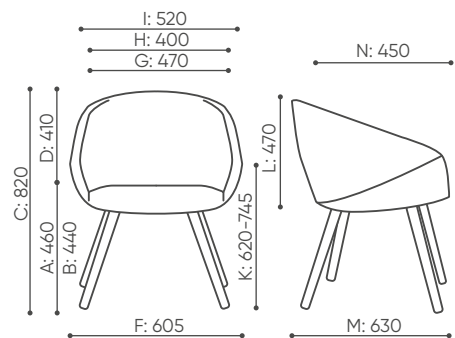


OX W 740

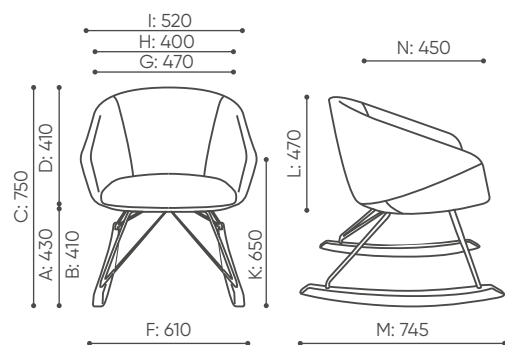


OX W 790

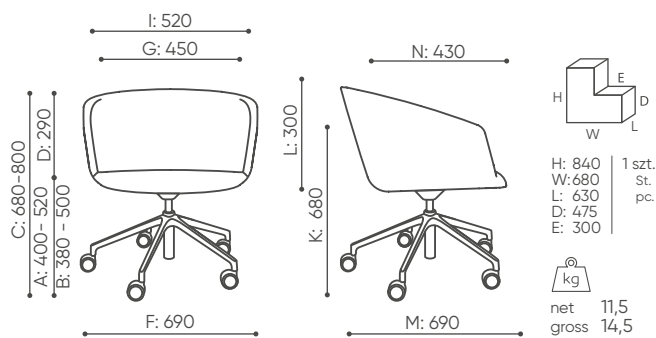


OX S 5R

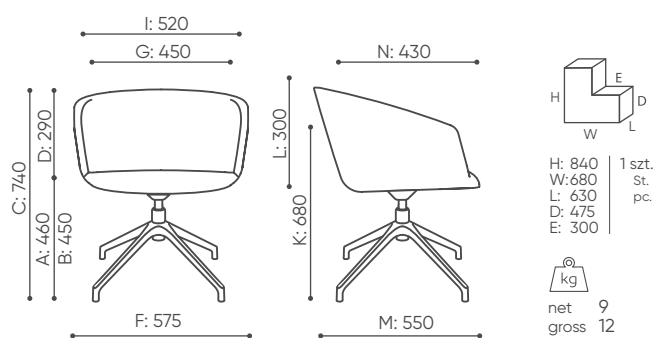


OX S 4R

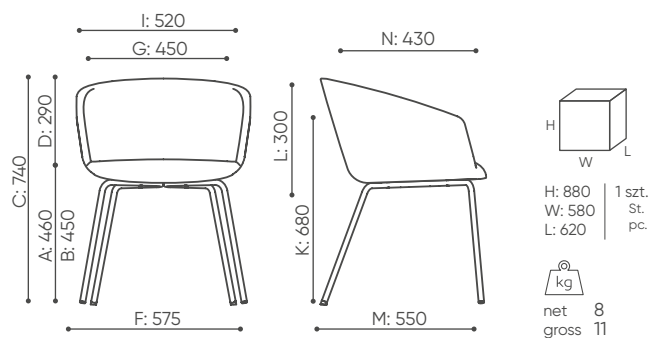


OX S 215

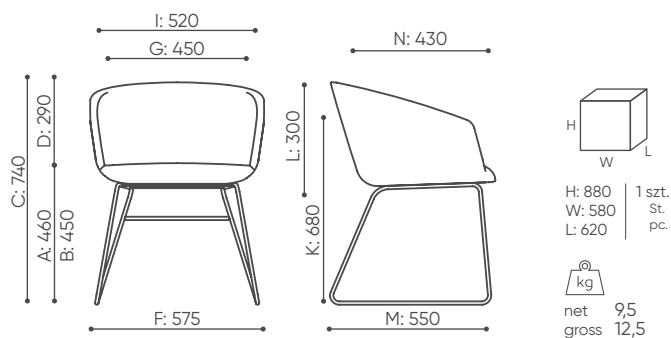


OX S 270

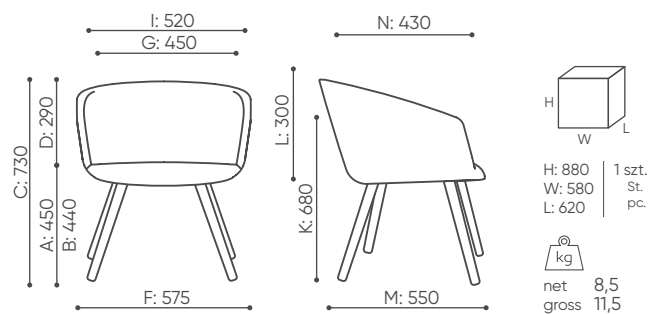


OX S W 740

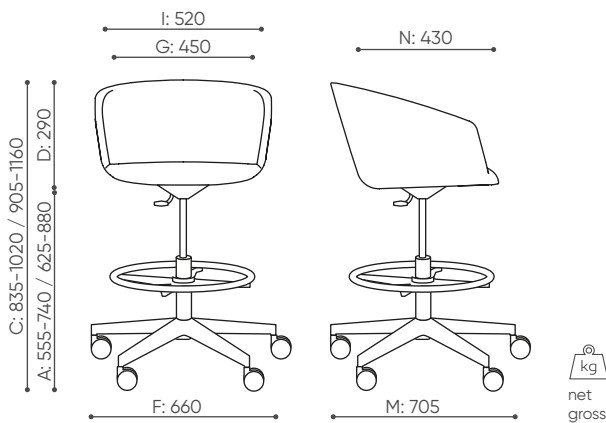

OX S 10R


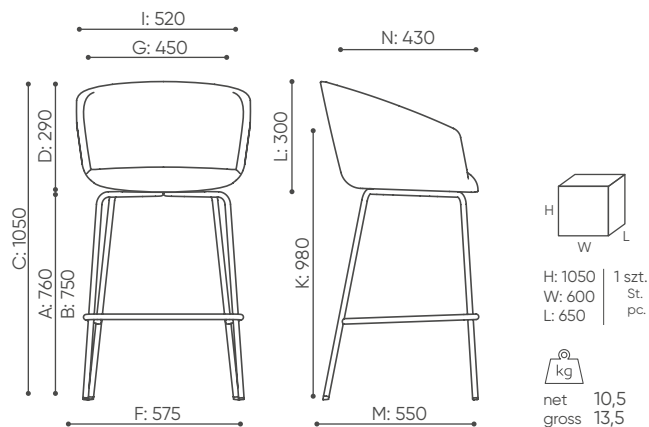


OX S H

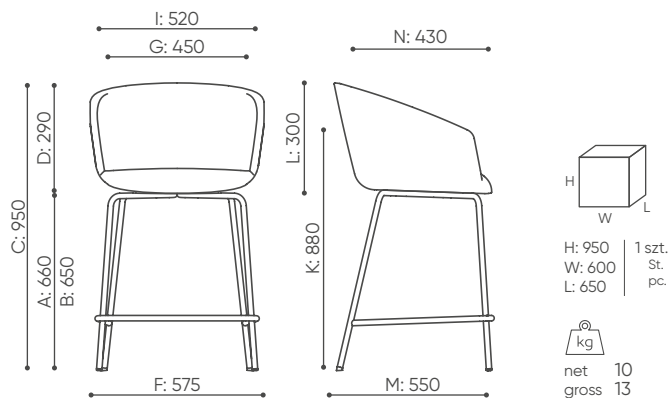

OX S HN

Dimensions and weights are approximate and may vary by 5%. The data is given for the basic configuration of products. The requirements of the standard are always met.

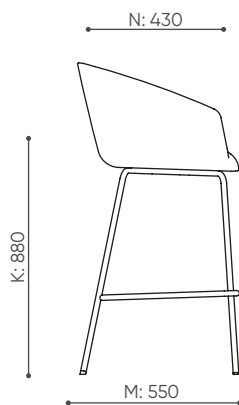
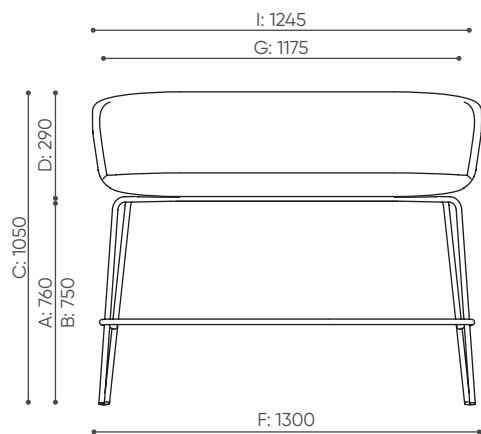


H: 1000
W: 1400
L: 850



net 20
gross

OX S LH

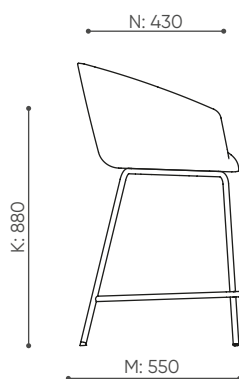
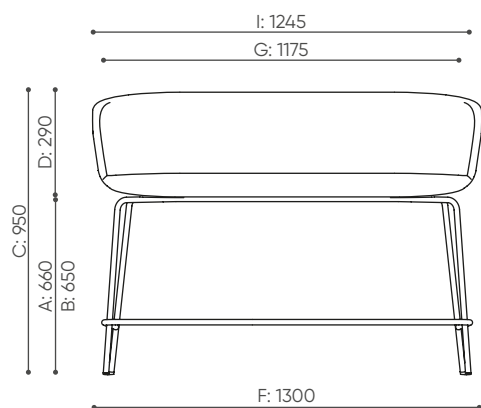


H: 1070
W: 1400
L: 850



net 19,5
gross

OX S LN

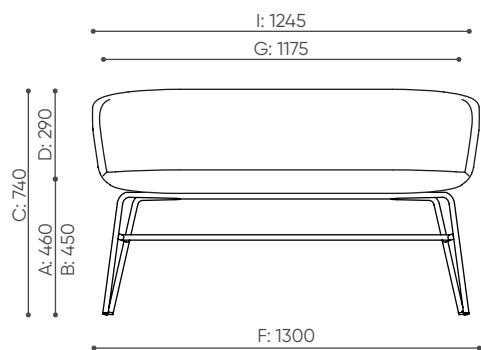

H: 740
W: 1380
L: 860



net 16,5
gross

OX S L215